



SPEED	IMPELLER DIA.	STYLE	SOLIDS DIA.	NS	VOLUTE	SUCTION	DISCHARGE	NO.VANES
1170	VARIOUS	ENCLOSED	.50"	926	SINGLE	5"	3"	7

## FW2103-1200 RPM

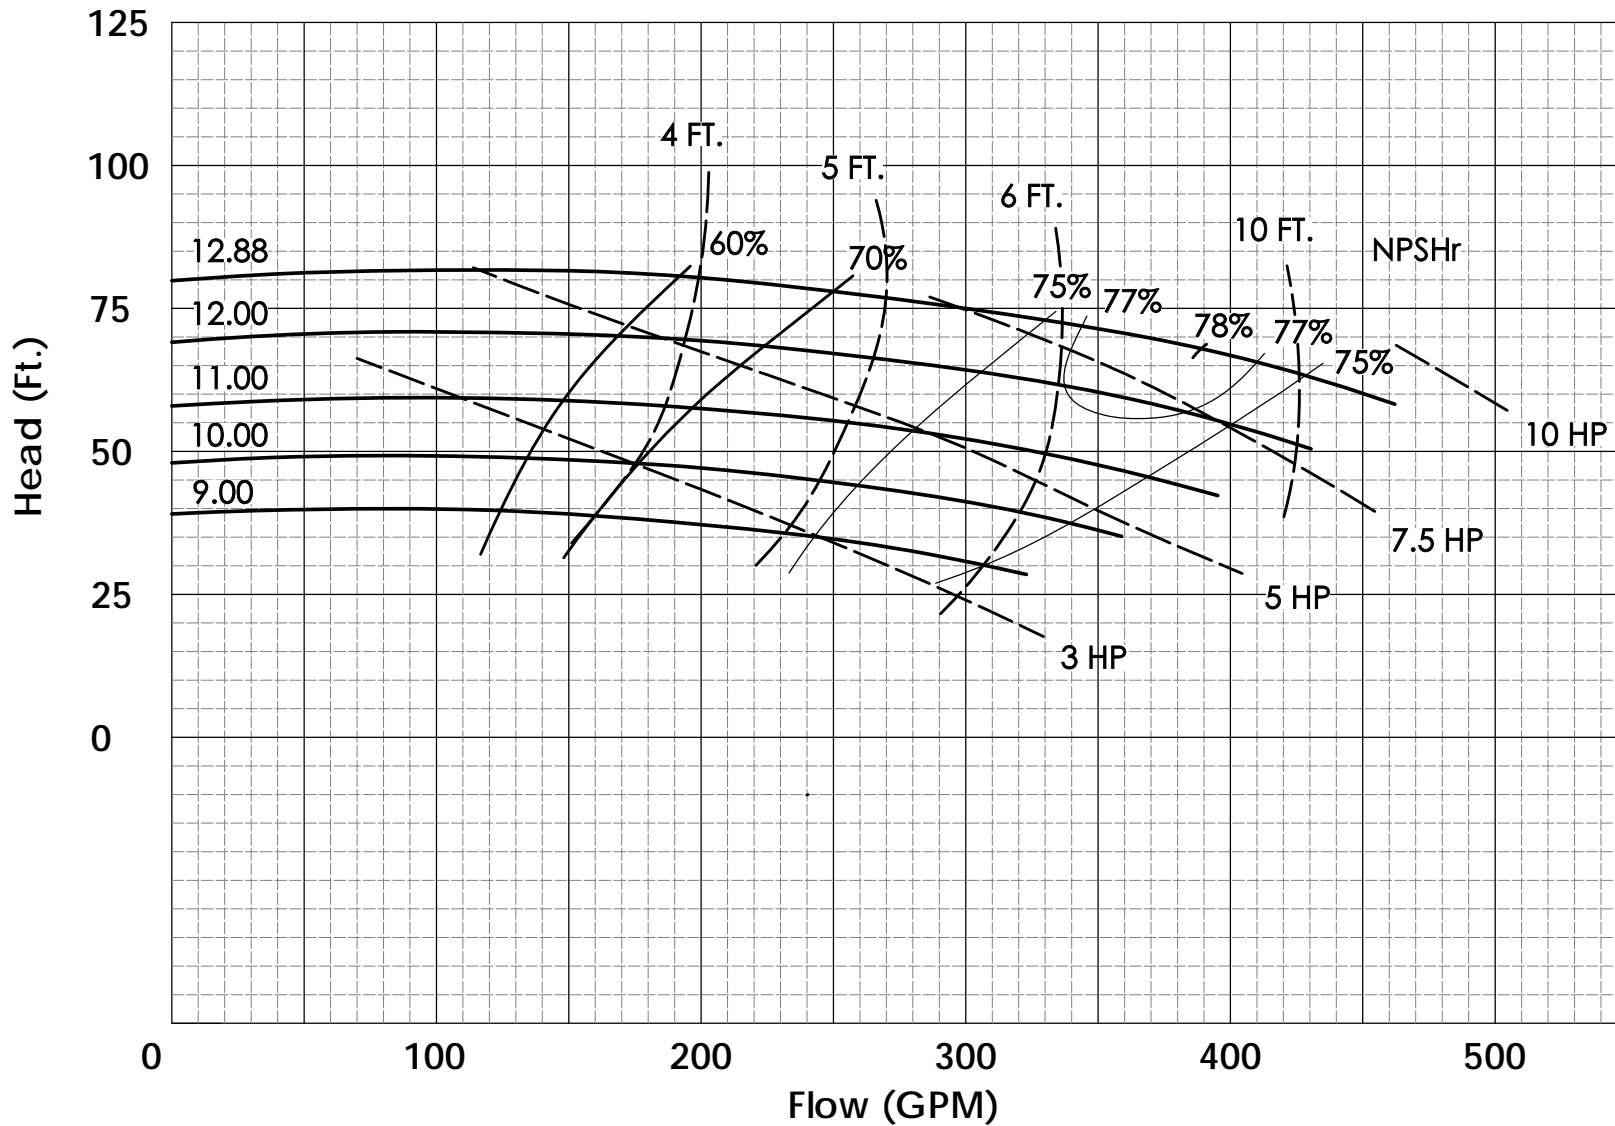


SPEED	IMPELLER DIA.	STYLE	SOLIDS DIA.	NS	VOLUTE	SUCTION	DISCHARGE	NO.VANES
1170	VARIOUS	ENCLOSED	.84"	1392	SINGLE	6"	4"	7

## FW2104-1200 RPM

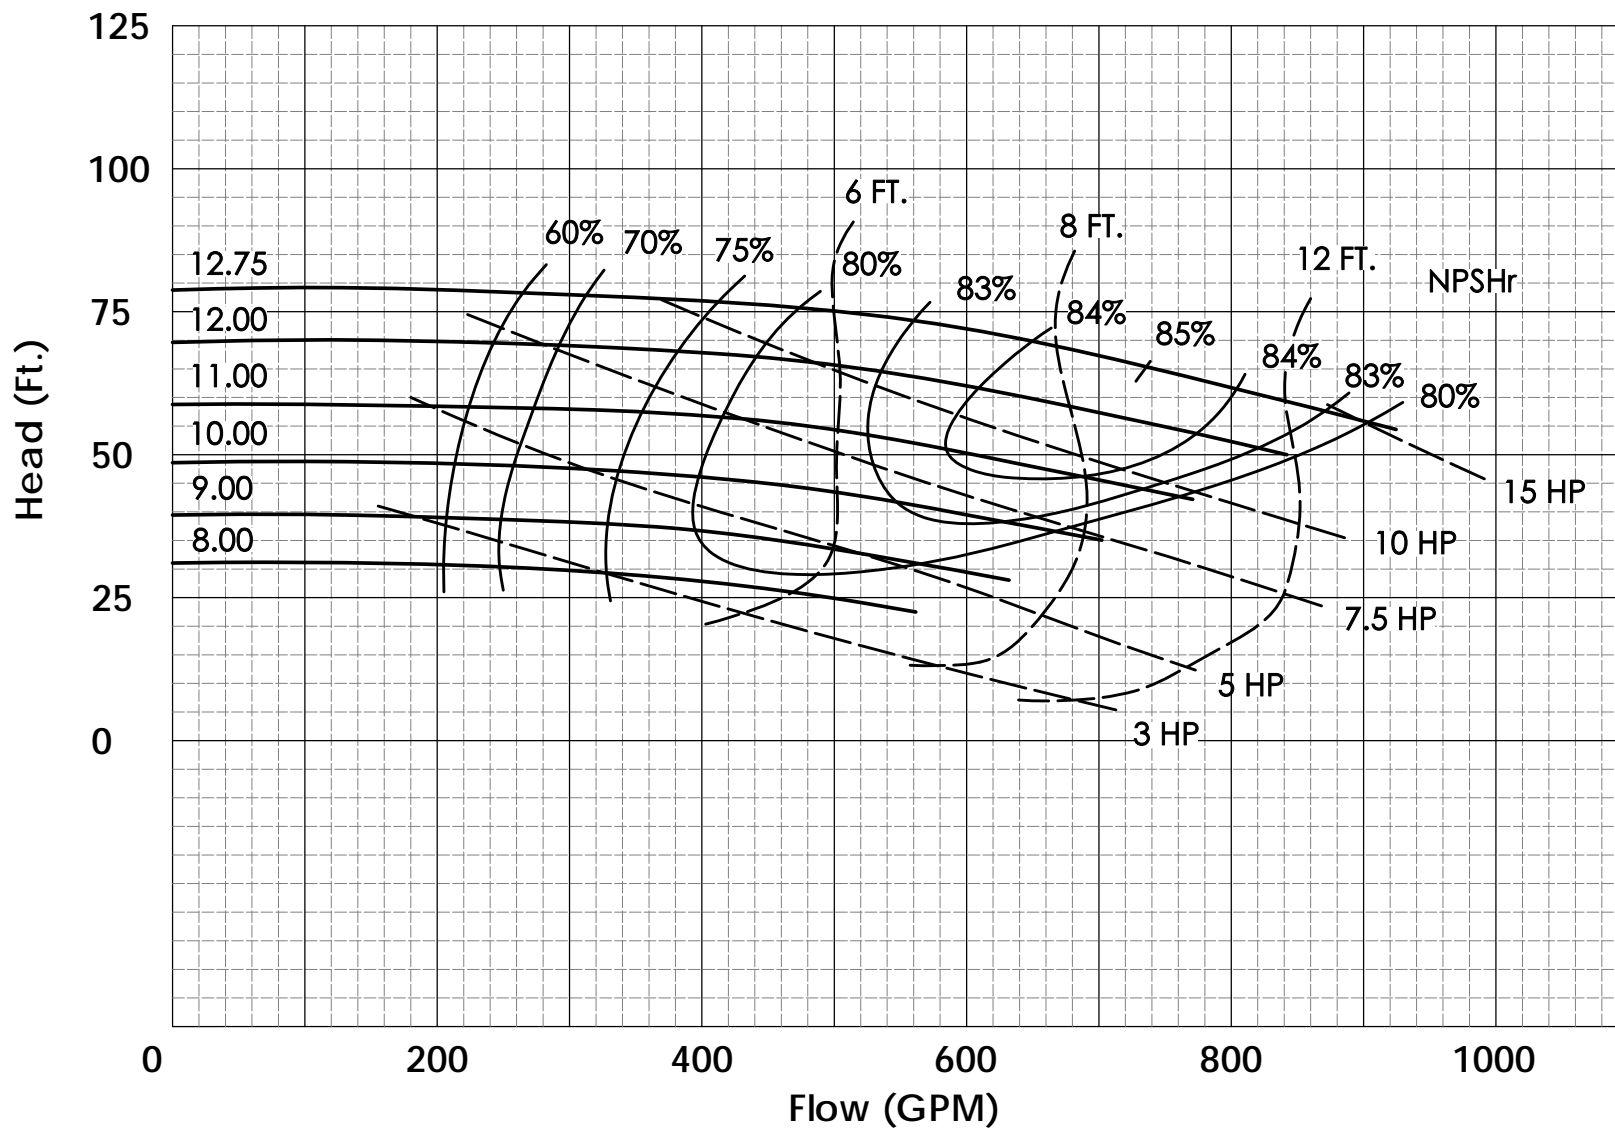

SPEED	IMPELLER DIA.	STYLE	SOLIDS DIA.	NS	VOLUTE	SUCTION	DISCHARGE	NO.VANES
1170	VARIOUS	ENCLOSED	1.00"	1559	DOUBLE	8"	5"	6

## FW2105-1200 RPM

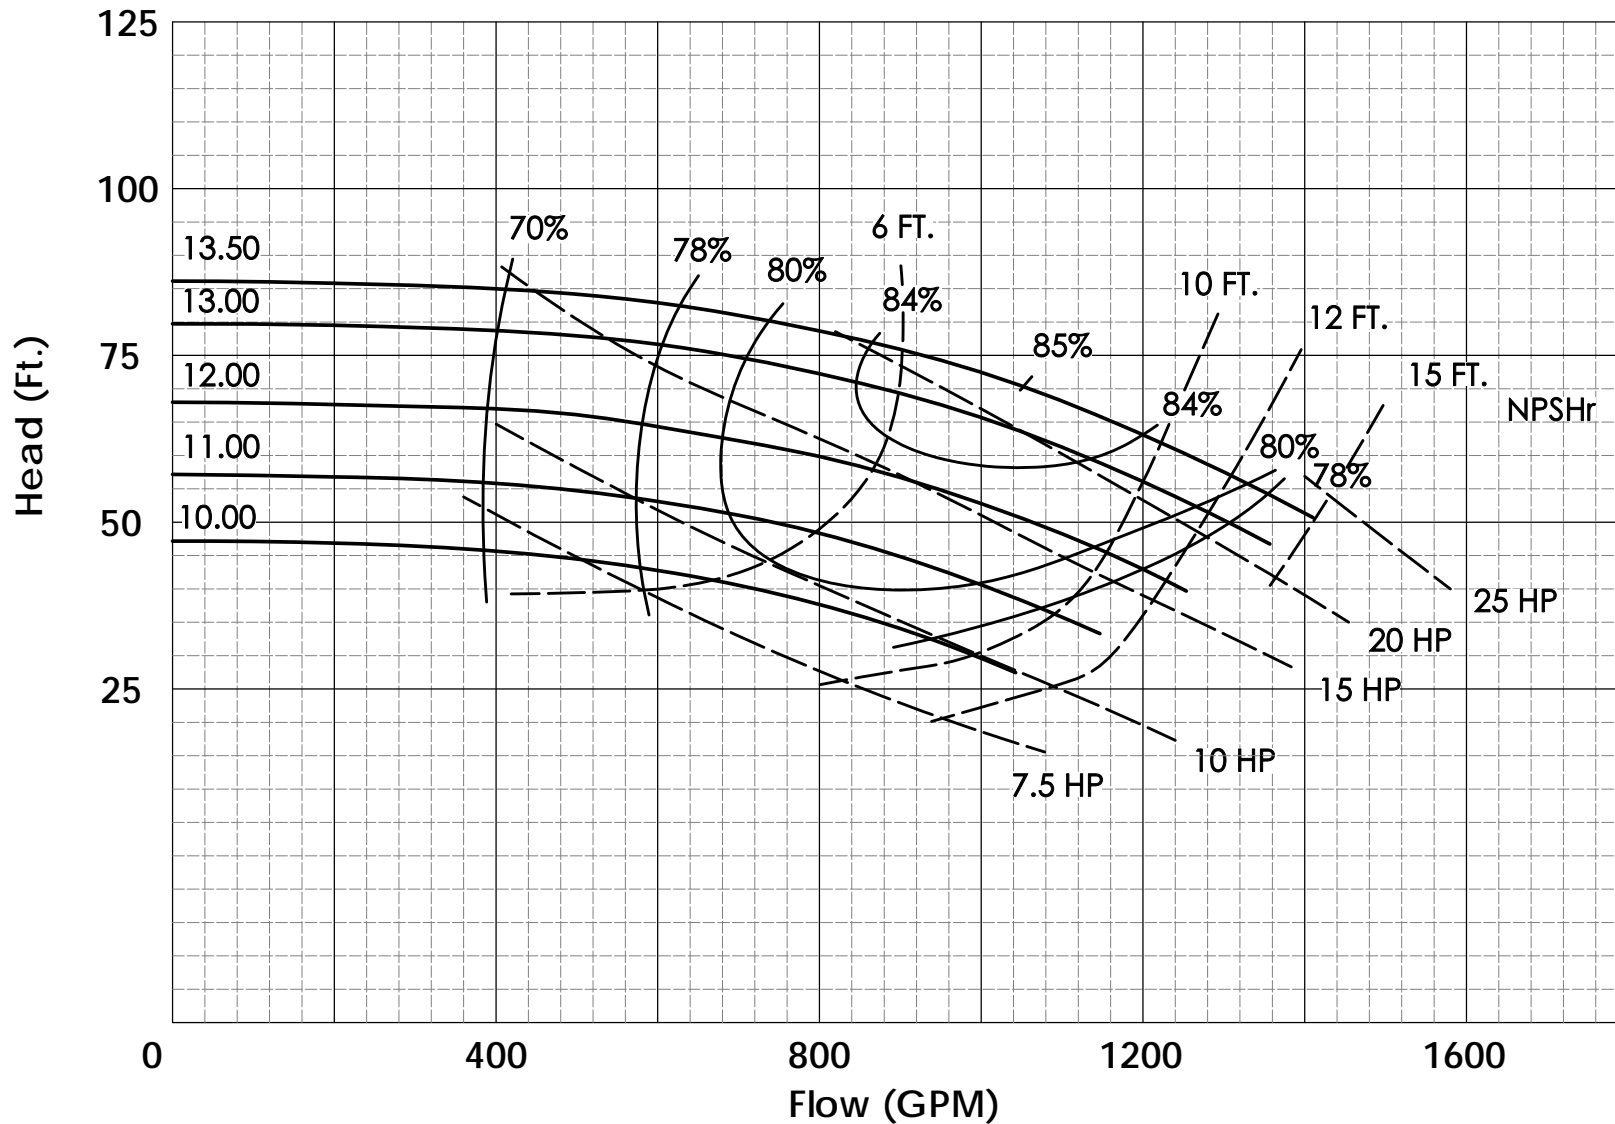

Performances shown are for clear, non-aerated water, frame-mounted configuration with mechanical seal. Efficiency corrections may be required for other mounting configurations, seal arrangements or liquids

SPEED	IMPELLER DIA.	STYLE	SOLIDS DIA.	NS	VOLUTE	SUCTION	DISCHARGE	NO.VANES
1170	VARIOUS	ENCLOSED	1.31"	2209	DOUBLE	10"	6"	6

## FW2106-1200 RPM

