




# PUMP PERFORMANCE CURVES

Curve No : FW6421031

Updated: Jan. 2020

| SPEED | IMPELLER DIA. | STYLE    | SOLIDS DIA. | NS  | VOLUTE | SUCTION | DISCHARGE | NO.VANES |
|-------|---------------|----------|-------------|-----|--------|---------|-----------|----------|
| 1775  | VARIOUS       | ENCLOSED | .50"        | 926 | SINGLE | 5"      | 3"        | 7        |

## FW2103-1800 RPM

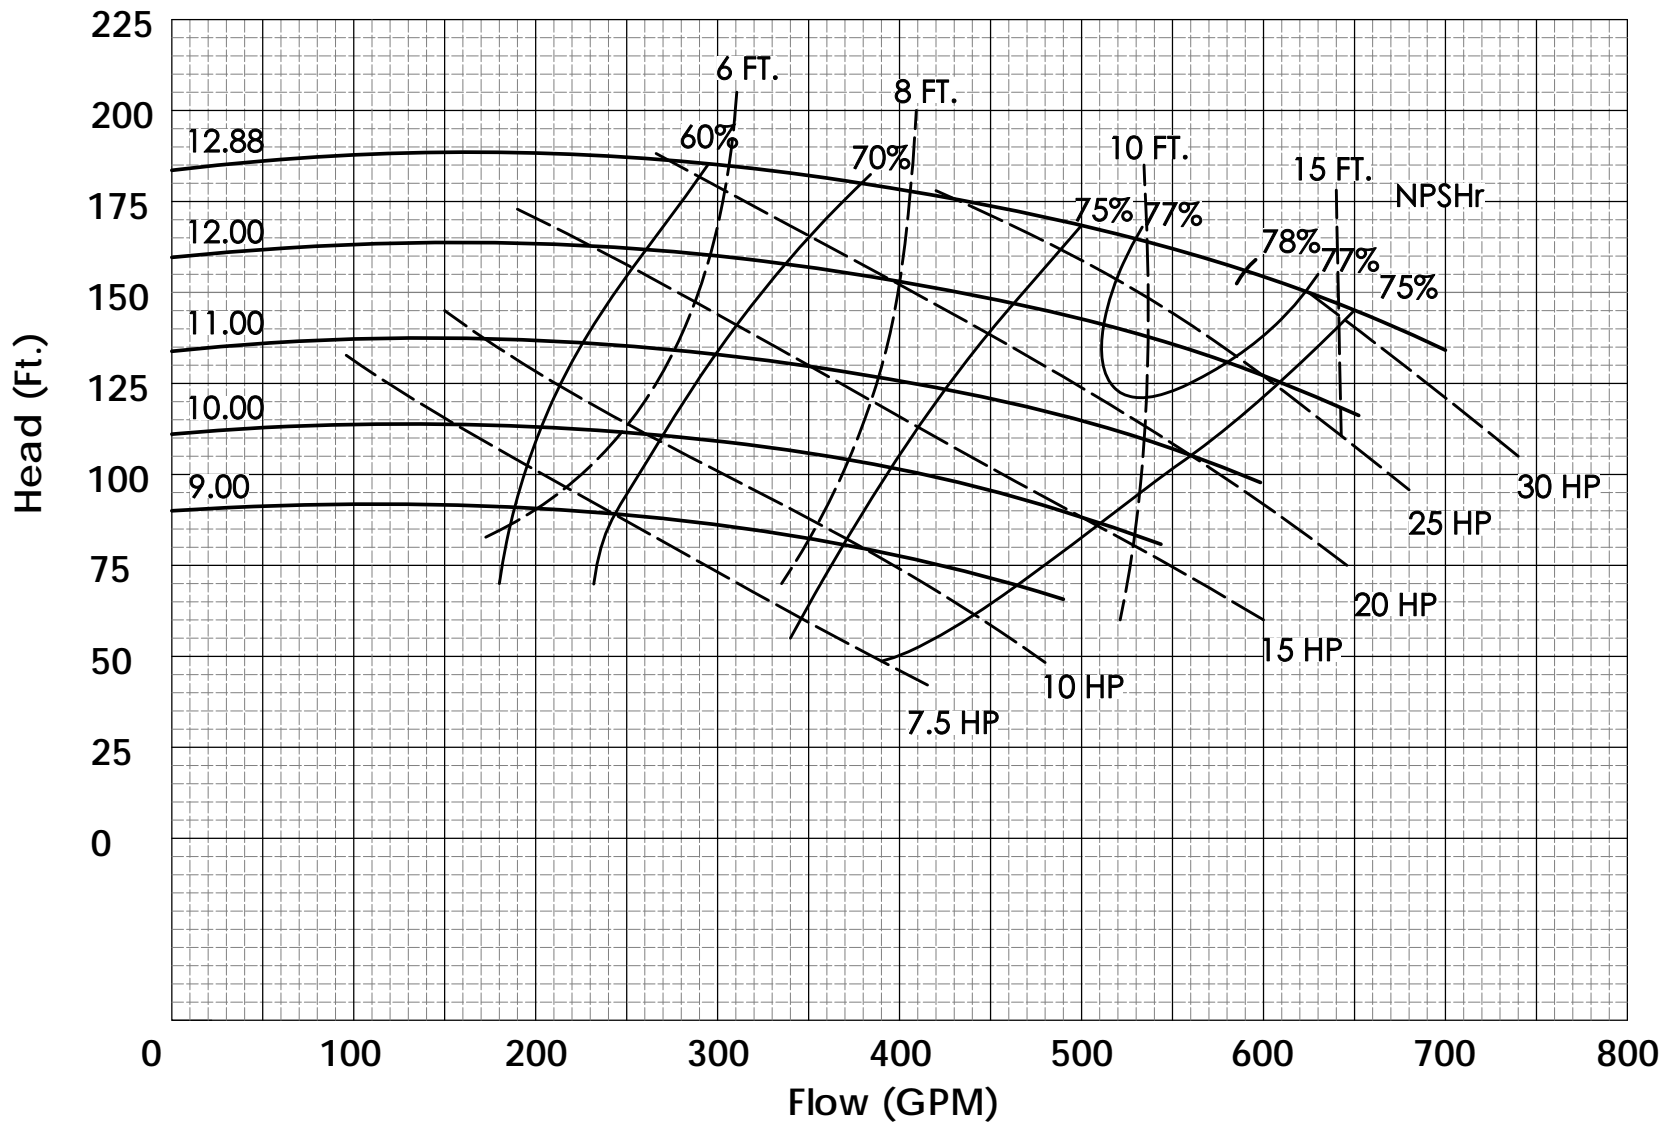

Performances shown are for clear, non-aerated water, frame-mounted configuration with mechanical seal. Efficiency corrections may be required for other mounting configurations, seal arrangements or liquids




# PUMP PERFORMANCE CURVES

Curve No : FW6421040

Updated: Oct. 2019

| SPEED | IMPELLER DIA. | STYLE    | SOLIDS DIA. | NS   | VOLUTE | SUCTION | DISCHARGE | NO.VANES |
|-------|---------------|----------|-------------|------|--------|---------|-----------|----------|
| 1775  | VARIOUS       | ENCLOSED | .84"        | 1392 | SINGLE | 6"      | 4"        | 7        |

## FW2104-1800 RPM

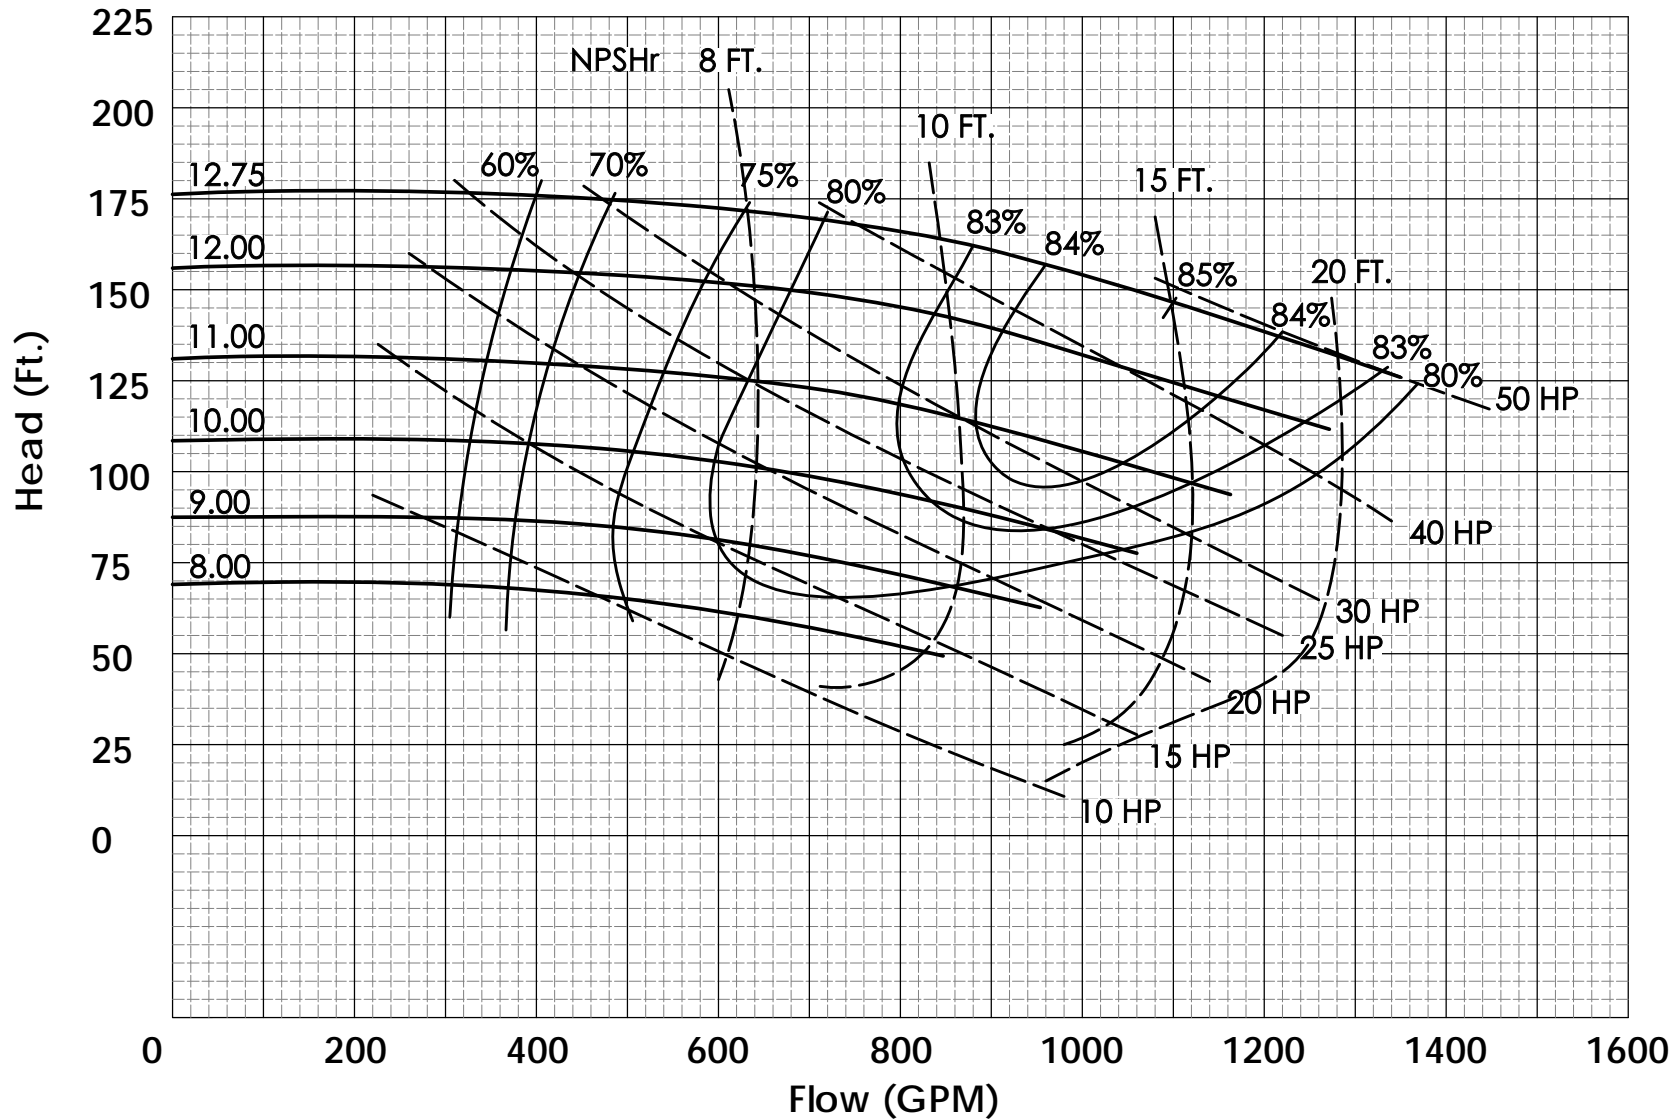

Performances shown are for clear, non-aerated water, frame-mounted configuration with mechanical seal. Efficiency corrections may be required for other mounting configurations, seal arrangements or liquids




# PUMP PERFORMANCE CURVES

Curve No : FW6421050

Updated: Oct. 2019

| SPEED | IMPELLER DIA. | STYLE    | SOLIDS DIA. | NS   | VOLUTE | SUCTION | DISCHARGE | NO.VANES |
|-------|---------------|----------|-------------|------|--------|---------|-----------|----------|
| 1780  | VARIOUS       | ENCLOSED | 1.00"       | 1559 | DOUBLE | 8"      | 5"        | 6        |

## FW2105-1800 RPM

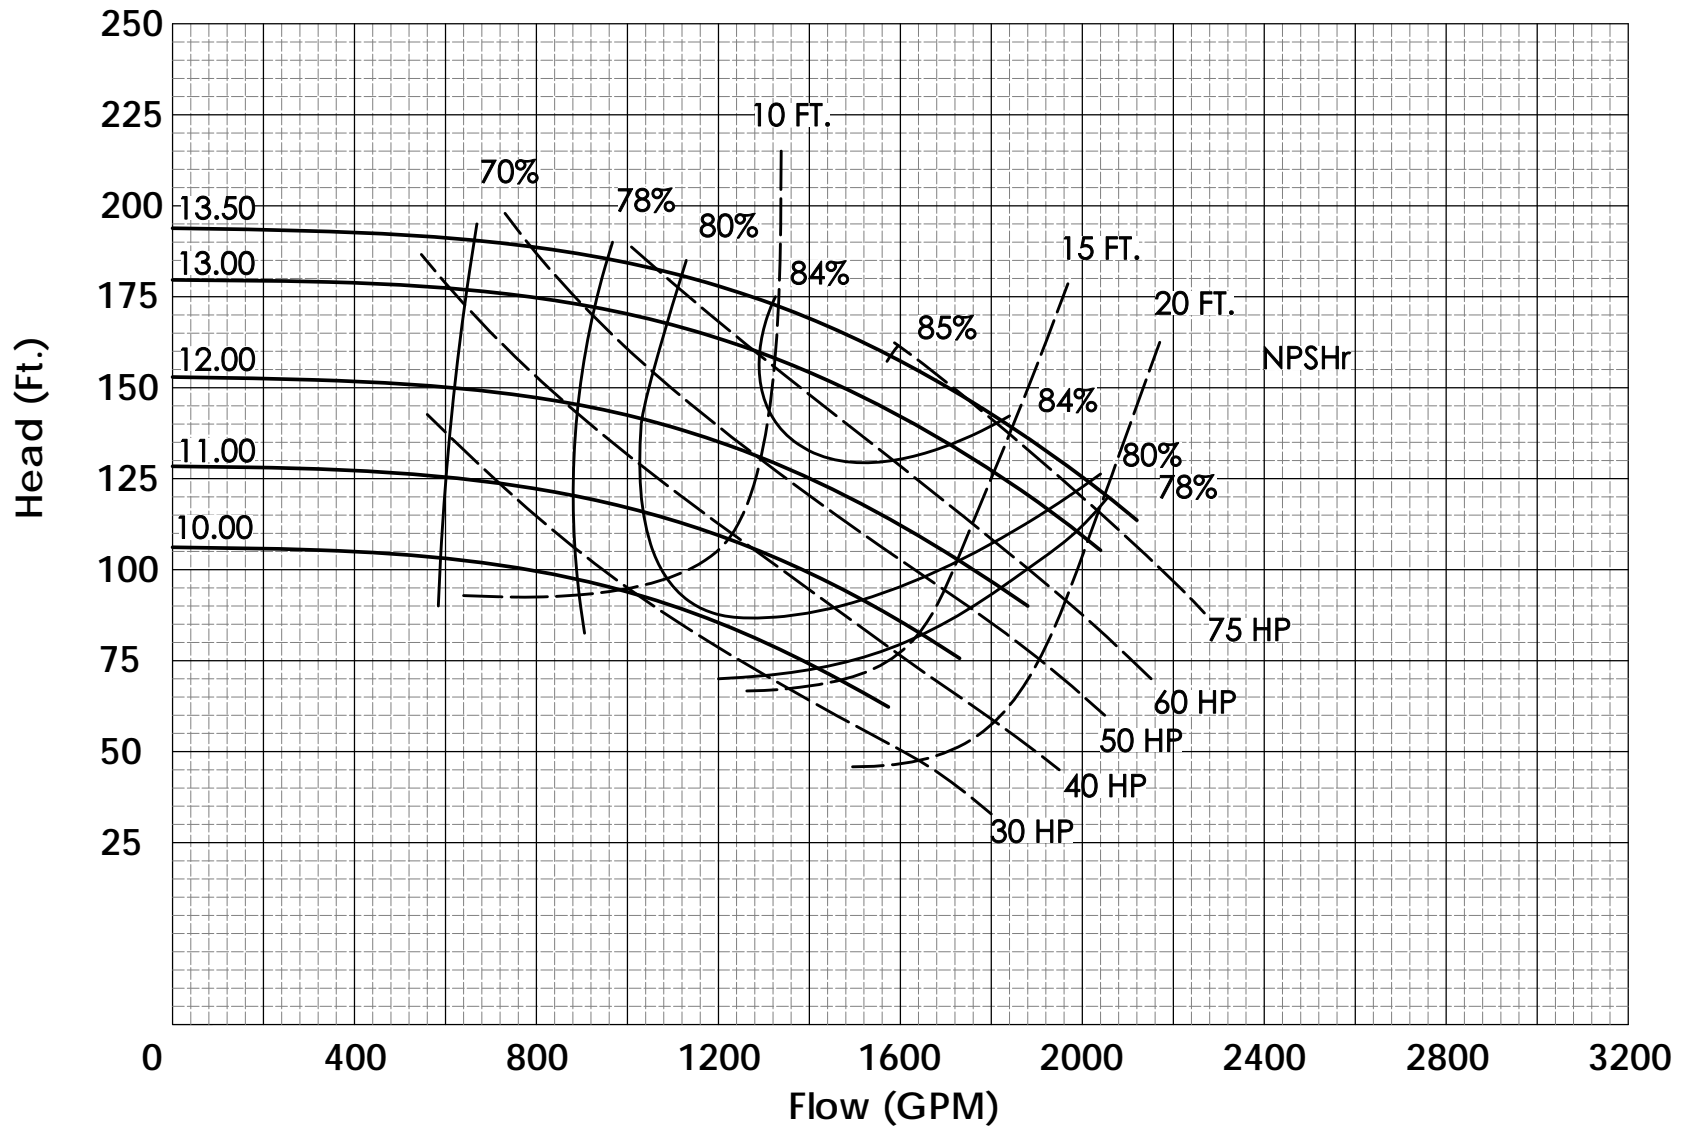

Performances shown are for clear, non-aerated water, frame-mounted configuration with mechanical seal. Efficiency corrections may be required for other mounting configurations, seal arrangements or liquids




# PUMP PERFORMANCE CURVES

Curve No : FW6421060

Updated: Oct. 2019

| SPEED | IMPELLER DIA. | STYLE    | SOLIDS DIA. | NS   | VOLUTE | SUCTION | DISCHARGE | NO.VANES |
|-------|---------------|----------|-------------|------|--------|---------|-----------|----------|
| 1780  | VARIOUS       | ENCLOSED | 1.31"       | 2209 | DOUBLE | 10"     | 6"        | 6        |

## FW2106-1800 RPM

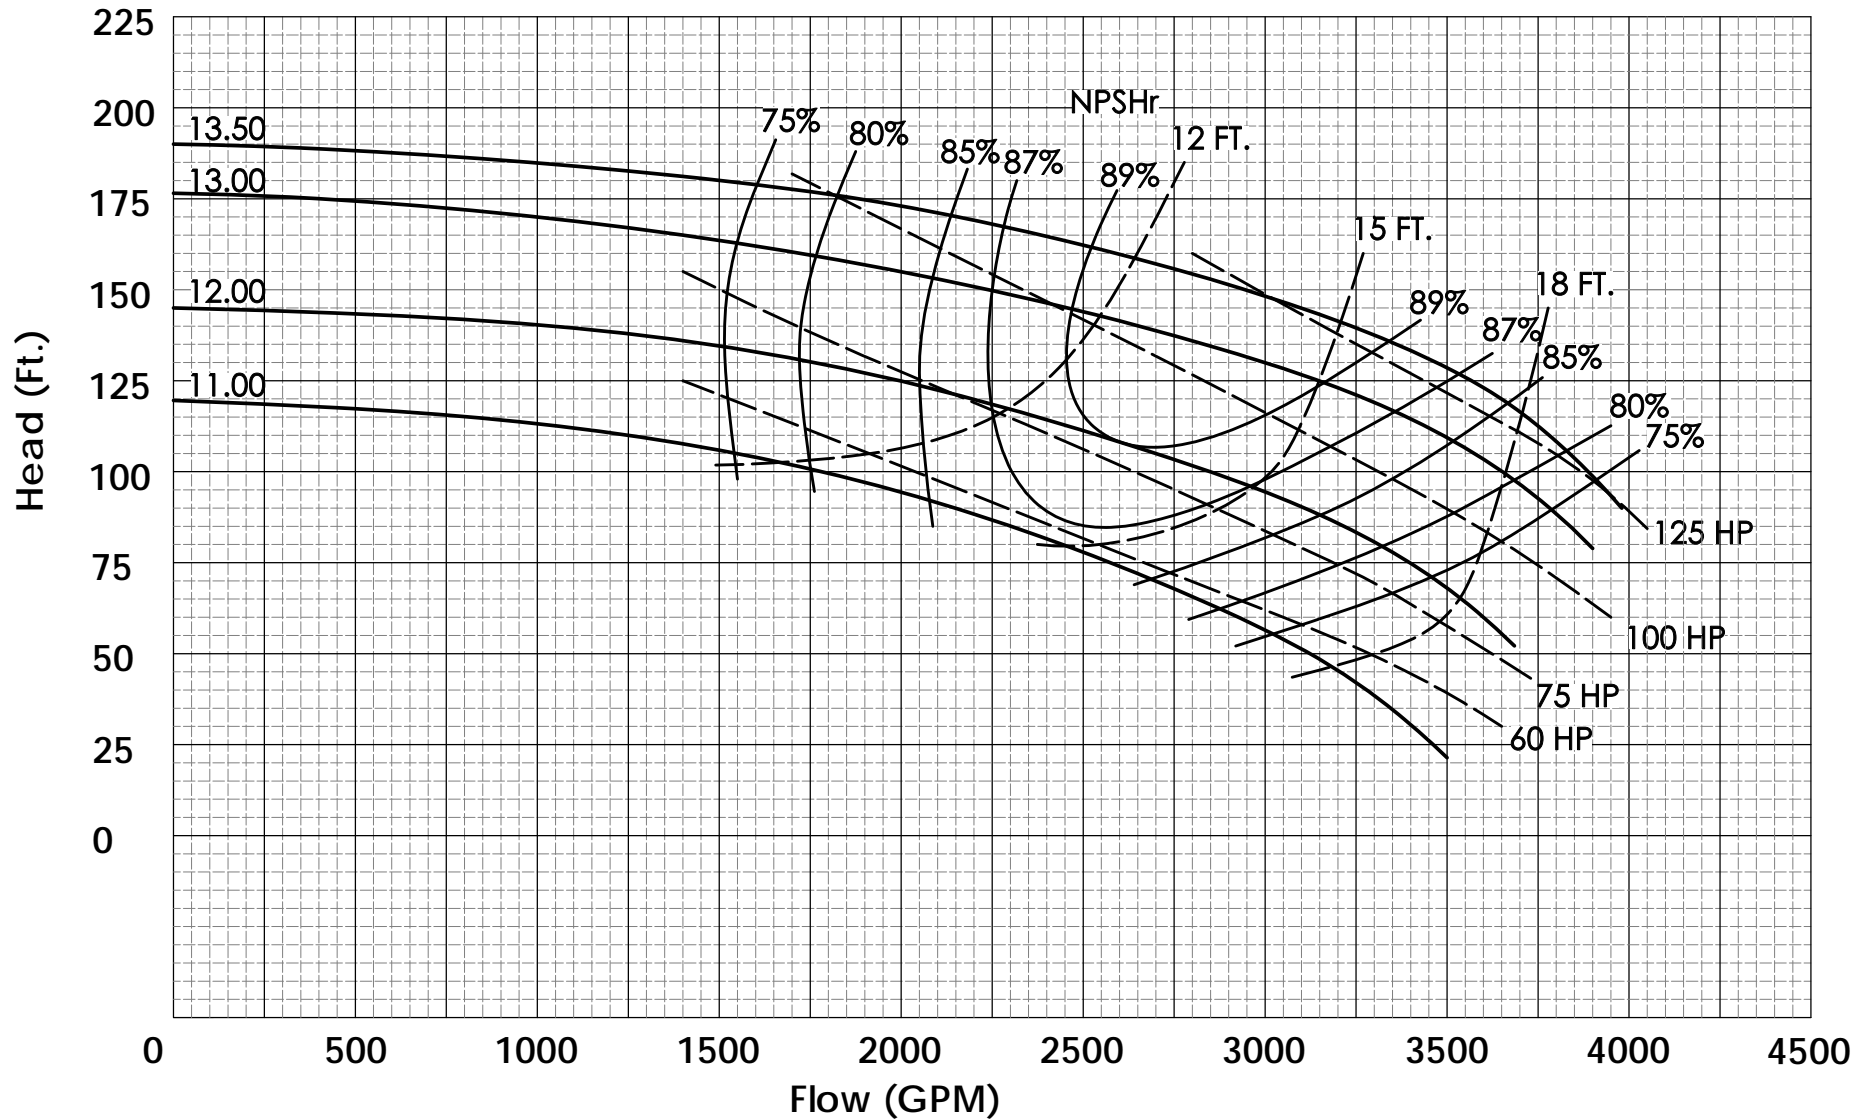

Performances shown are for clear, non-aerated water, frame-mounted configuration with mechanical seal. Efficiency corrections may be required for other mounting configurations, seal arrangements or liquids