




PUMP PERFORMANCE CURVES

Curve No : FWVS21030

Updated: Feb. 2020

SPEED	IMPELLER DIA.	STYLE	SOLIDS DIA.	NS	VOLUTE	SUCTION	DISCHARGE	NO.VANES
VARIOUS	12.88"	ENCLOSED	.50"	926	SINGLE	5"	3"	7

FW2103 - VARIOUS RPM

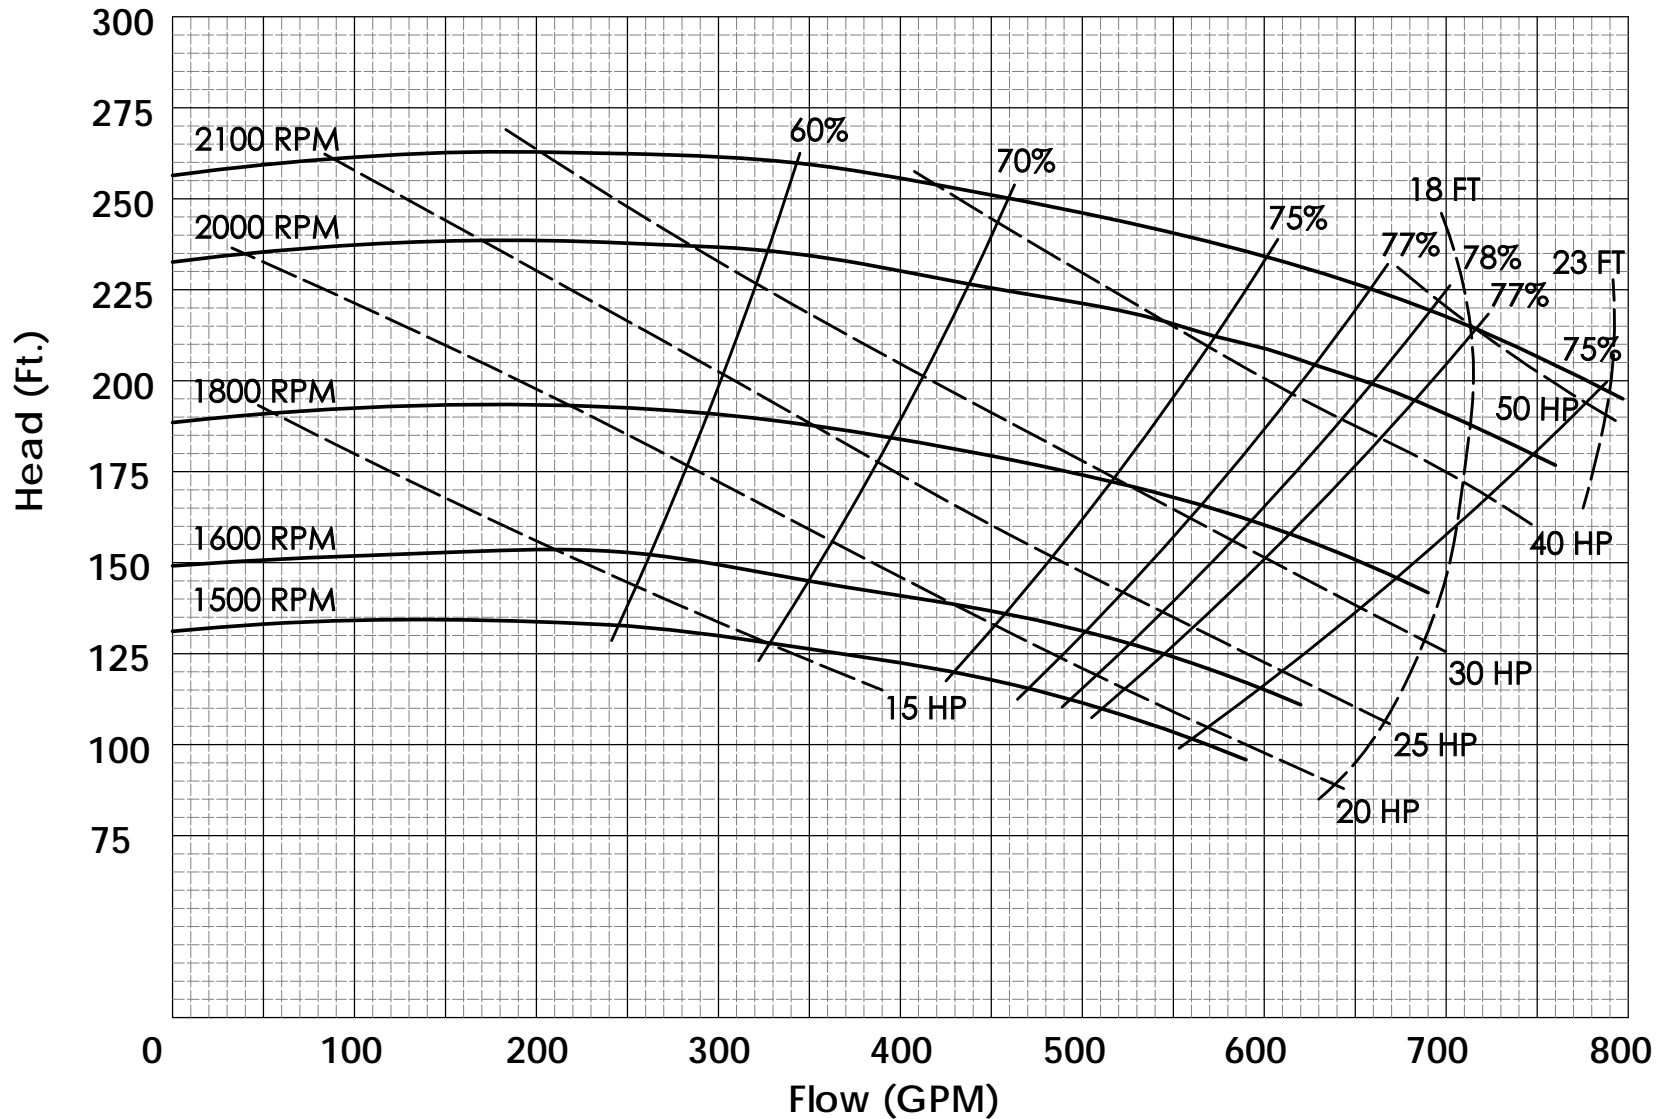

Performances shown are for clear, non-aerated water, frame-mounted configuration with mechanical seal. Efficiency corrections may be required for other mounting configurations, seal arrangements or liquids




PUMP PERFORMANCE CURVES

Curve No : FWVS21040

Updated: Feb. 2020

SPEED	IMPELLER DIA.	STYLE	SOLIDS DIA.	NS	VOLUTE	SUCTION	DISCHARGE	NO.VANES
VARIOUS	12.75"	ENCLOSED	.84"	1392	SINGLE	6"	4"	7

FW2104 - VARIOUS RPM

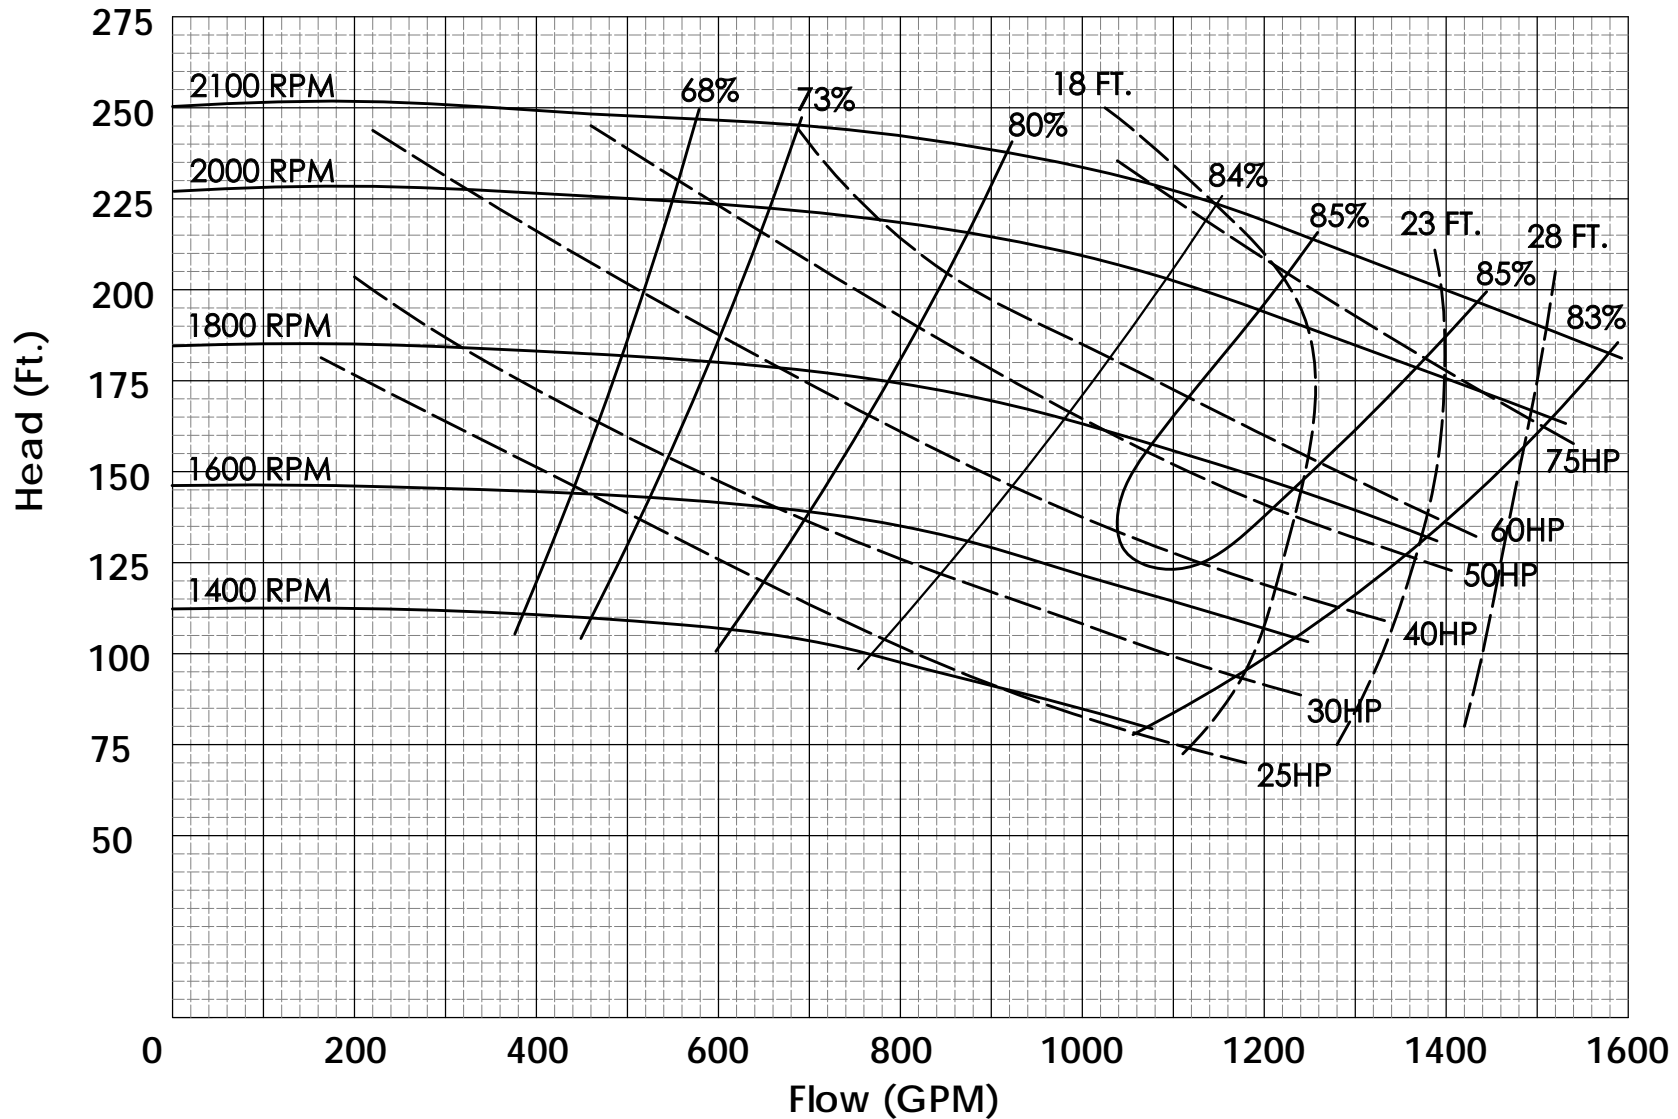

Performances shown are for clear, non-aerated water, frame-mounted configuration with mechanical seal. Efficiency corrections may be required for other mounting configurations, seal arrangements or liquids




PUMP PERFORMANCE CURVES

Curve No : FWVS21050

Updated: Feb. 2020

SPEED	IMPELLER DIA.	STYLE	SOLIDS DIA.	NS	VOLUTE	SUCTION	DISCHARGE	NO.VANES
VARIOUS	13.5"	ENCLOSED	1.00"	1559	DOUBLE	8"	5"	6

FW2105 - VARIOUS RPM

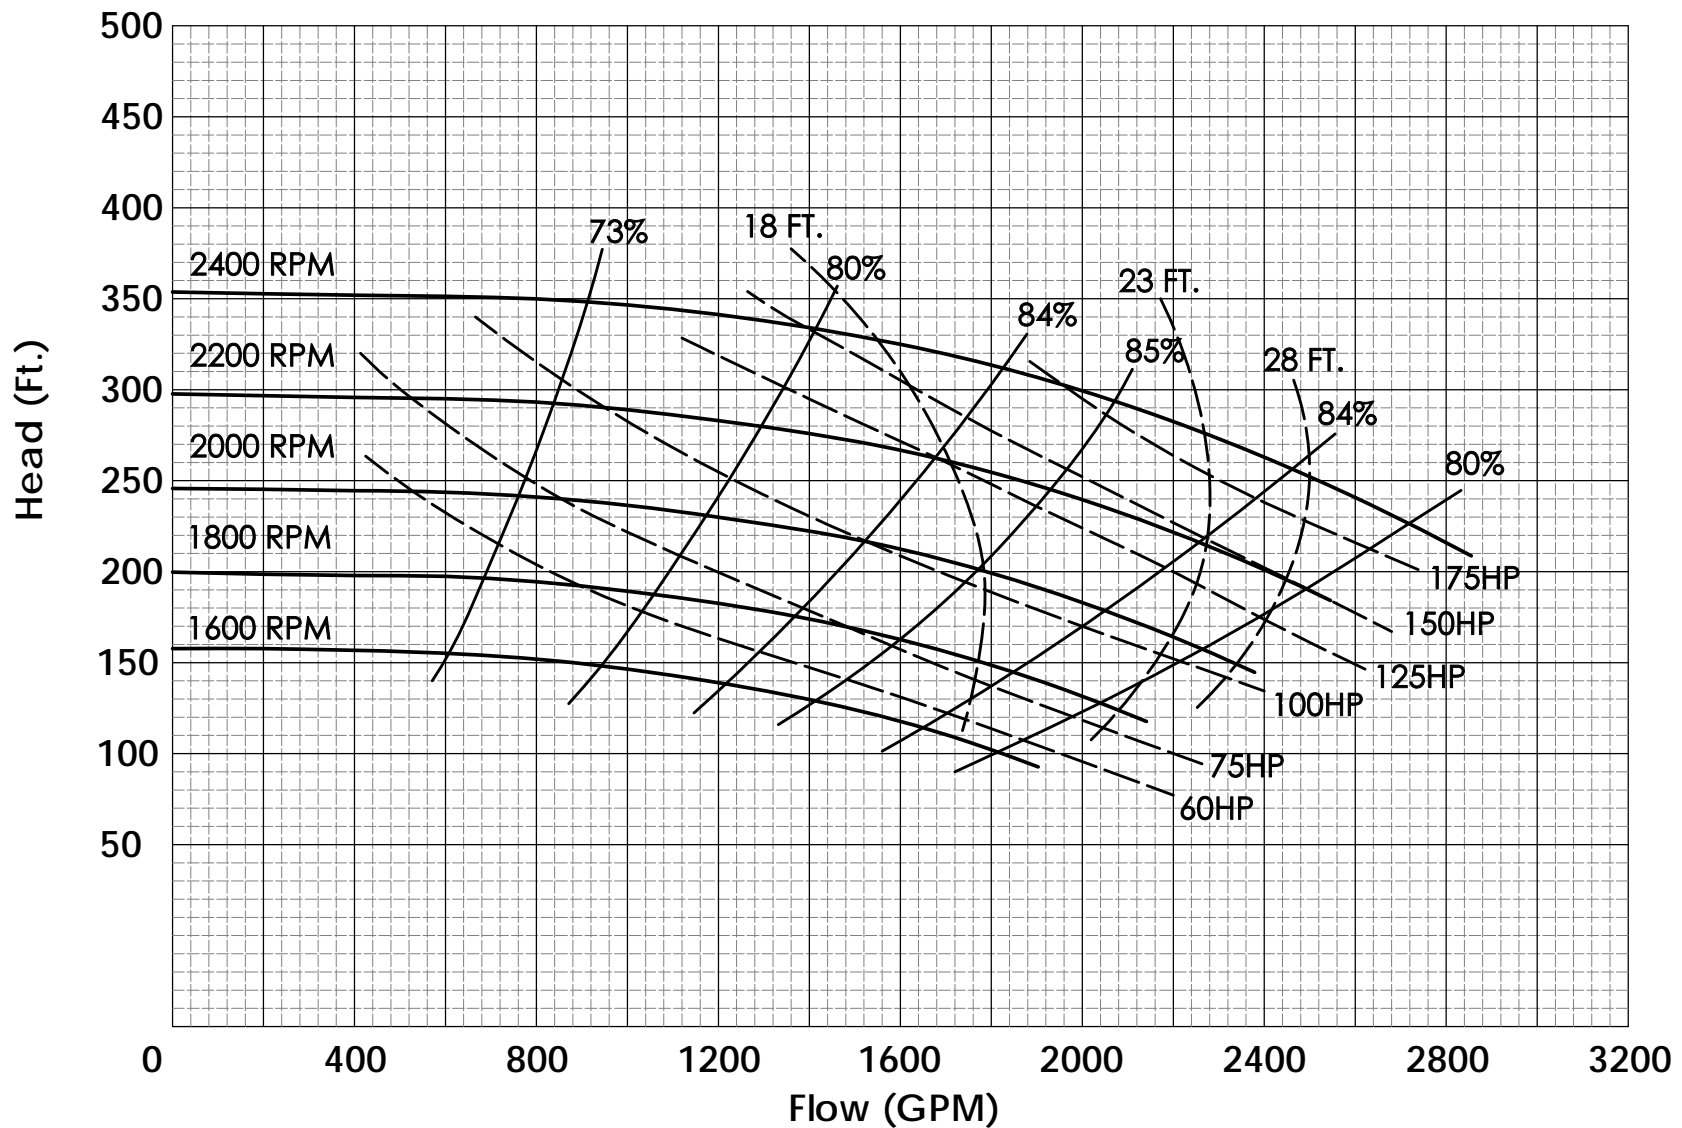

Performances shown are for clear, non-aerated water, frame-mounted configuration with mechanical seal. Efficiency corrections may be required for other mounting configurations, seal arrangements or liquids

SPEED	IMPELLER DIA.	STYLE	SOLIDS DIA.	NS	VOLUTE	SUCTION	DISCHARGE	NO.VANES
VARIOUS	13.5"	ENCLOSED	1.31"	2334	DOUBLE	10"	6"	6

FW2106 - VARIOUS RPM

